



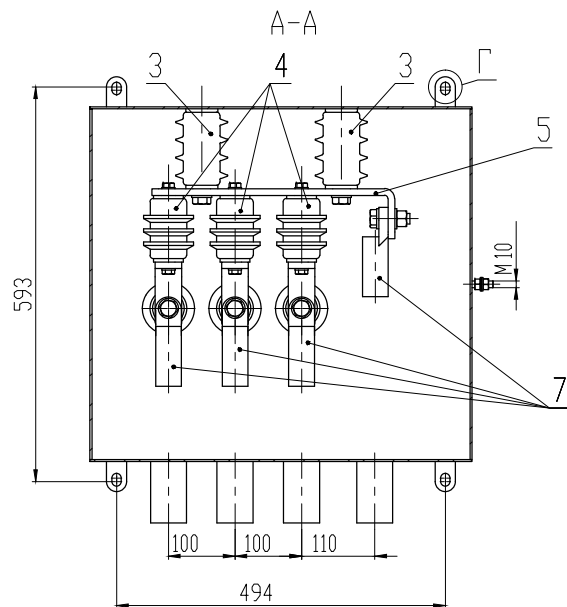
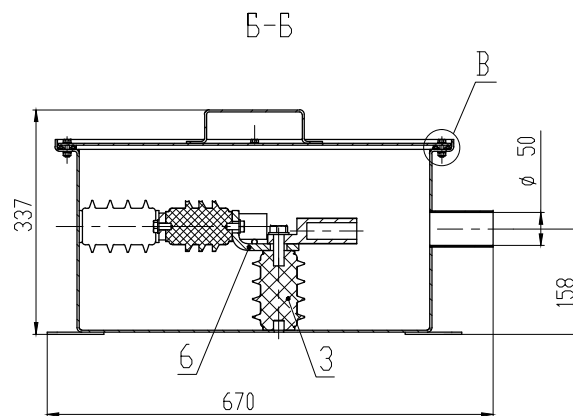


РКС.К3303.000

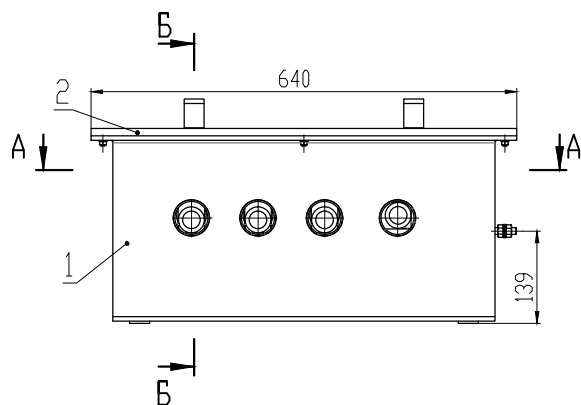

-Earthing link box type KZE-0-3 is designed for direct earthing of three coaxial bonding cables, at the device of the line of 10-500 kV.

-The response surge arresters - 6 kV.

-Earthing wire in not supplied.

-Earthing wire should have copper multiwire conductor with the cross-sections from 95 to 400 mm² and the insulation withstand voltage of 10 kV DC.

-Complete with fixing clamps for hexagon crimping on copper conductors section from 95 to 400 mm².

-Conductor cross-section of wire and the outer diameter must be specified when ordering boxes.

-Entrance of wires of earthing and cable end fixing clamps are pressurized by thermoseated tubes CFM Raychman 56/16 black with glue (4 pieces on 100 mm), being included in the package deliveries.

-Protection class: IP54, IP68.

-Climatic performance UHL 1.

-Housing box must be grounded in accordance with the PUE.

Поз.	Наименование	Примечание	Кол.
1	Box	Stainless steel	1
2	Cap	Stainless steel	1
3	Insulator	ИОСК 10-8 УХЛ2	5
4	Surge Arresters	ОПН-РВ-6/7,6УХЛ1	3
5	Corner	Tinned Copper	1
6	Corner	Tinned Copper	3
7	Cable lugs	Tinned Copper	4

				РКС.К3303.000			
Изм./Лист	№ док-м.	Подп.	Дата	Earthing link box KZE-0-3			
Разраб.	Данилов		30.01.12				
Пров.	Бурзачин		30.01.12				